


Multifuser DC4


Installation Manual

EN

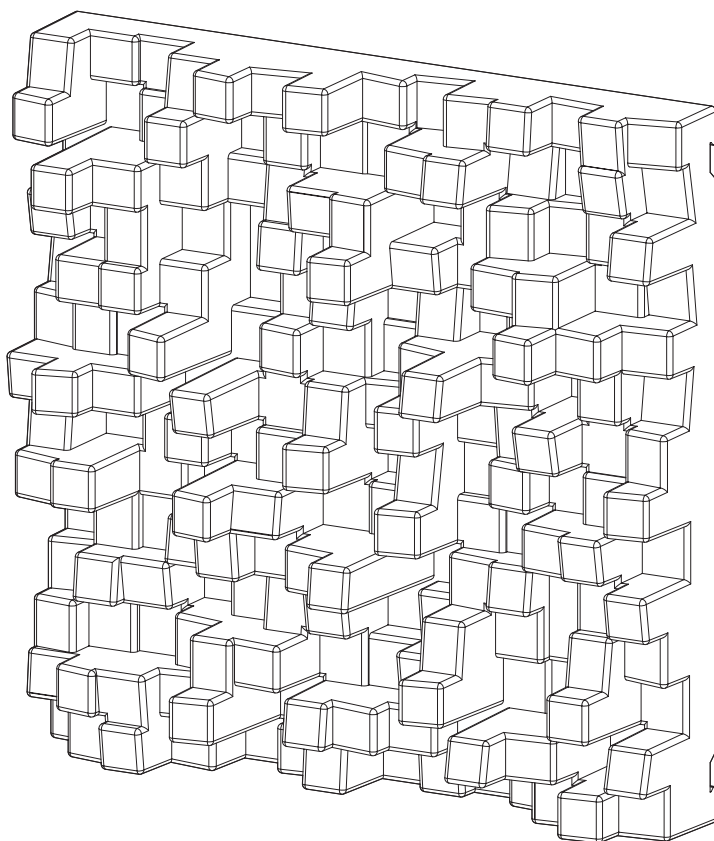


✓ MATERIAL NEEDED

Included

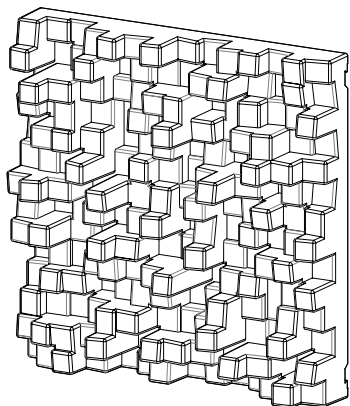

Multifuser DC4




Silicone Drop x8



VicFix Mini x4

Not Included




6mm Phillips Screwdriver



Measuring Tape




Wall Plugs and Screws



Level




Drill




Flexi Glue Ultra





This product can be installed on the wall with VicFix Mini and on the ceiling using Flexi Glue Ultra (not supplied).

Wall Installation



Ceiling Installation

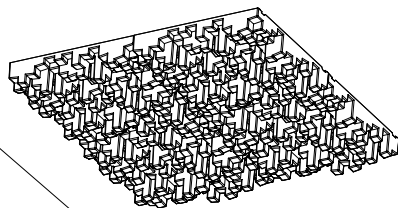

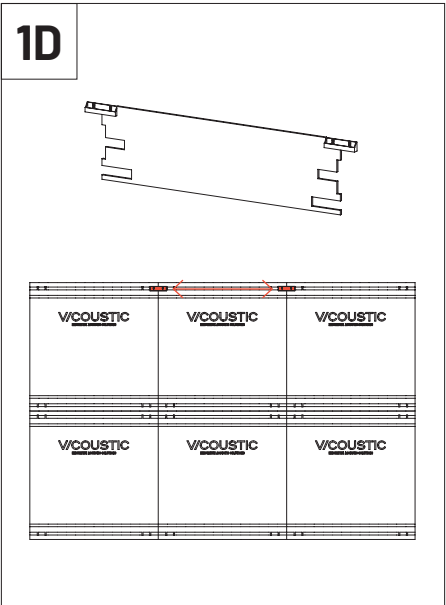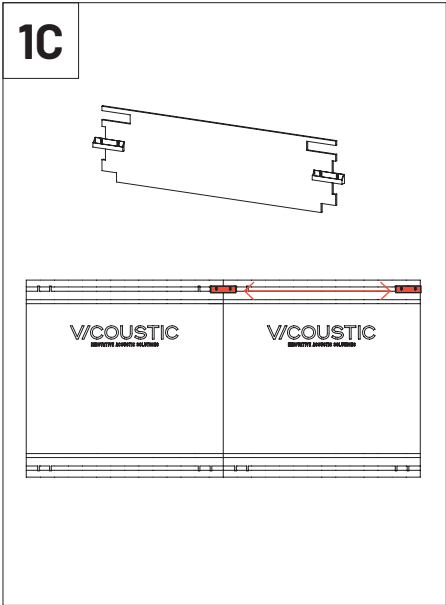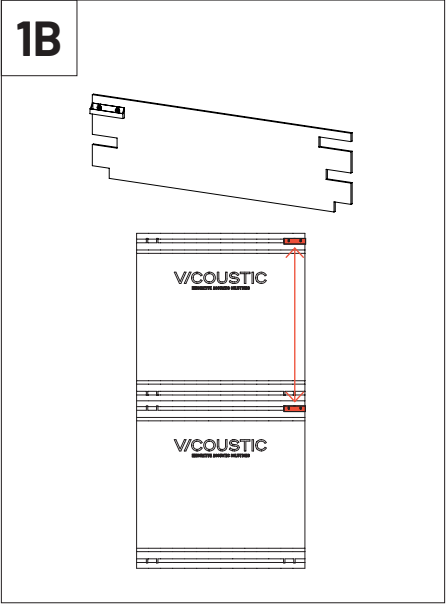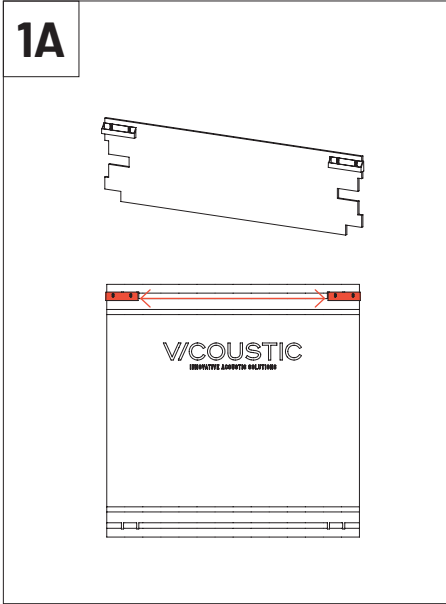

2


Wall installation - One panel

After defining the place where you want to install the panels, start marking the position of the Multifuser DC4 fixation clips.





This product can also be installed using Flexi Glue Ultra.

2A



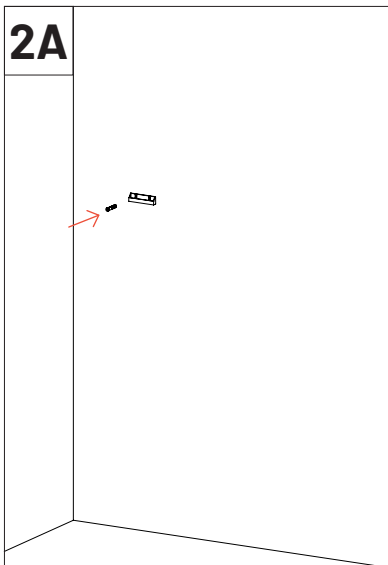


2B

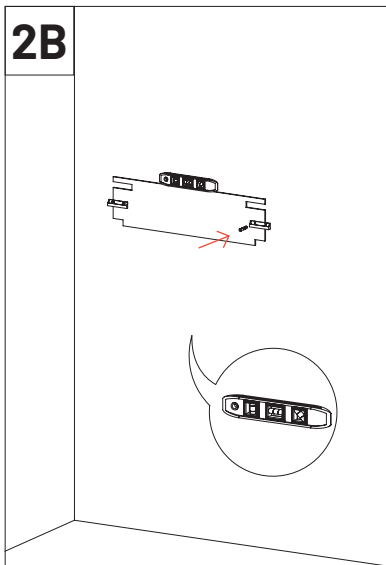


Wall installation - Installation up to three panels


Define the place where you want to install the panels and fix the First VicFix Mini. From there and with the help of the gauge provided, mark the positioning of the remaining fixation clips.

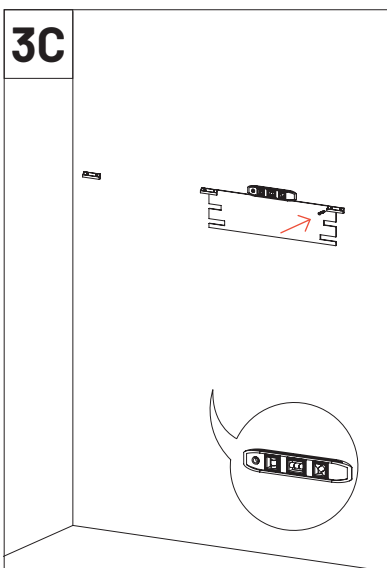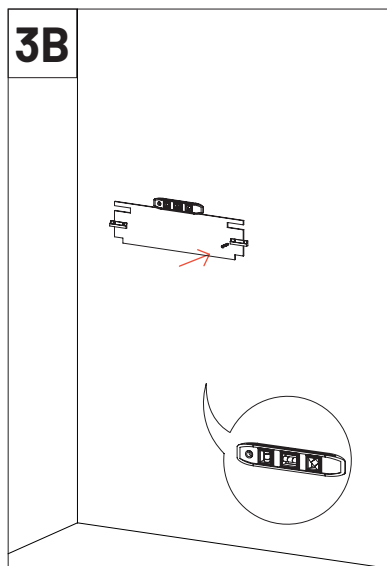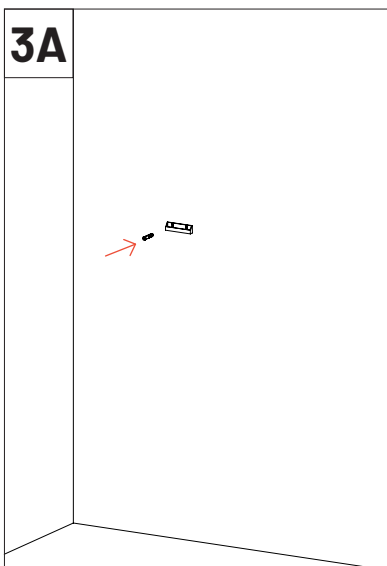

3D

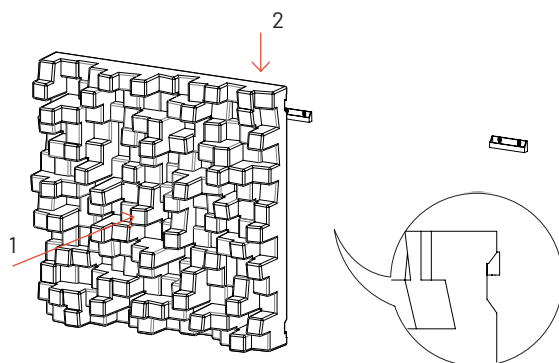


3E

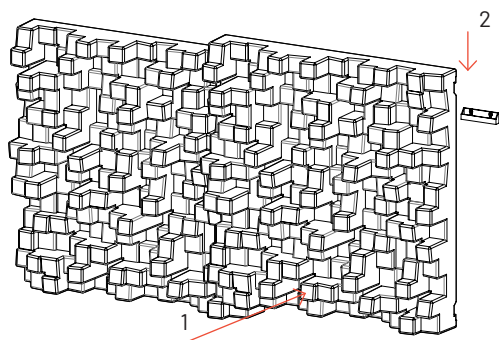

3F

To install the last Multifuser DC4, use it to mark the inner side of the last fixing clip. Remove the last two panels again and use the gauge provided to ensure the clips are aligned. Fix the last clip. You can use a bubble level to help in this procedure.


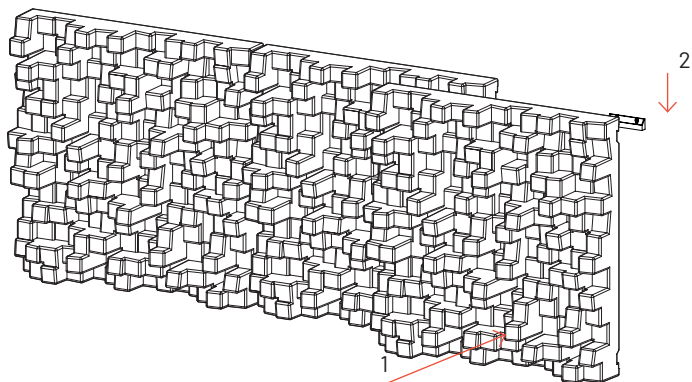


4




Wall Installation - Vertical Installation

Install the first panel according to step number 2.


Follow the steps described in the following diagrams.

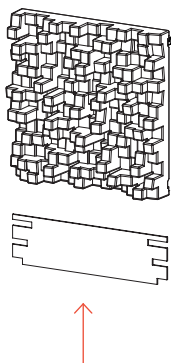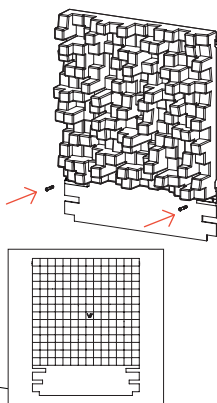4A**4B****4C**

Remove the top panel so that you can install the bottom panel first.

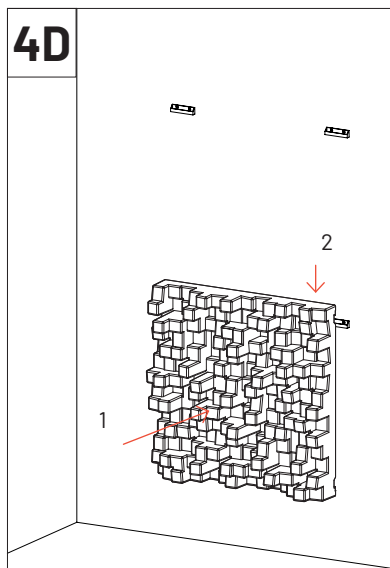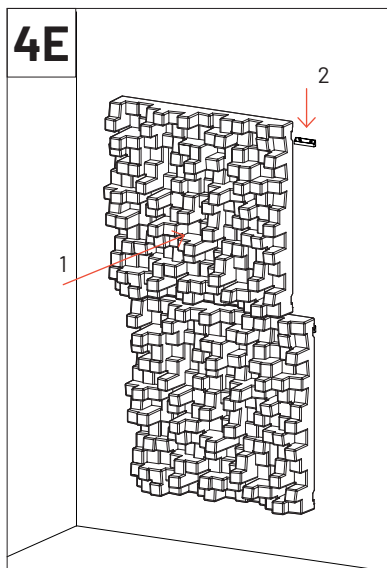**4D****4E**


Ceiling Installation



If the nozzle is not already cut, cut it according to the diagram.


1

Apply three lines of glue on the back of the acoustic panel. Do not wait longer than 10 minutes after applying the glue to attach the panel to the wall.



2

Place the panel in the predefined position. Once in the desired place, press firmly against the wall for 15 seconds.

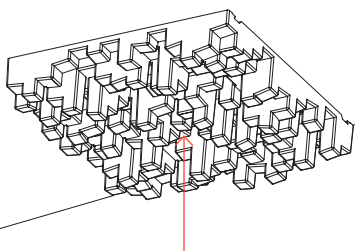

Use the same process to install the panels on the ceiling.

!

Always apply the glue in stripes. Do not apply the glue in dots. When applying the glue, position the nozzle tip pre-cut at 45° angle, so that it applies some pressure on the glue against the back of the panel.

For ceiling panel installations, you may need to use ceiling supports to hold the panels in place while the glue dries.

To ensure that you maximise the strength of the glue, don't make any adjustments or remove the panel after bonding.

Wall and ceiling surfaces should be examined prior to installation, ensuring they are clean, smooth, and dry. If you have unpainted gypsum board surfaces, these should be primed with a drywall primer (or another material manufactured especially for the purpose), to equalize the absorption between the gypsum board face paper, joint compound, and skin coating materials. You should then apply the paint, and allow air circulation in order to dry the paint within the time frame specified by the paint manufacturer. Please ensure the paint is dry before installing the acoustic panel. Make sure the room has all the necessary conditions to receive the acoustic panels. After you apply the glue on the back of each acoustic panel, please ensure you hold the acoustic panel against the wall the required time (mentioned above), and ensure it stays fixed in place. This method is also applicable to ceiling installations.

HQ – Factory and Office

Rua do Polo 3, Nr. 151 – Freamunde
4590-335 Paços de Ferreira, Portugal
Tel: +351 255 070 044

Info and Sales

E sales@vicoustic.com

www.vicoustic.com

