



VicFoam Square

Installation Manual

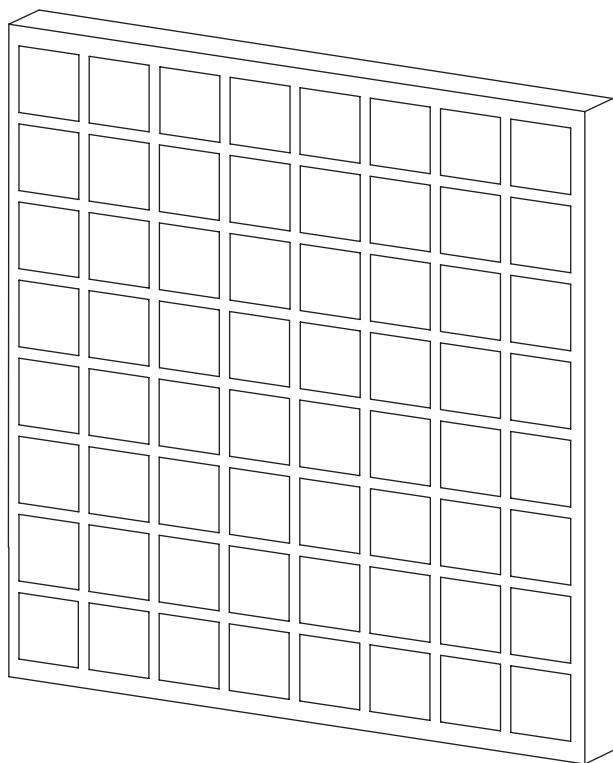


MATERIAL NEEDED

Included




ViFoam Square

Not Included




Level



Glue




Measuring Tape



If the nozzle is not already cut, cut it according to the diagram.


1

Apply the glue on the back of the acoustic panel, near the edges, but still in the foam part of the panel (approx. 2²/₅ cm from the edge). Do not wait longer than 10 minutes after applying the glue to attach the panel to the wall.

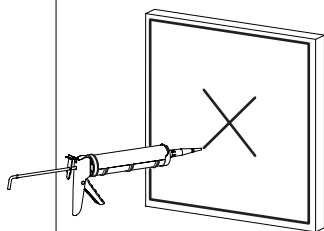

2

Place the panel in the predefined position. Once in the desired place, press firmly against the wall for 15 seconds.



Use the same process to install the panels on the ceiling.

!

Always apply the glue in stripes. Do not apply the glue in dots. When applying the glue, position the nozzle tip pre-cutted at 45° angle, so that it applies some pressure on the glue against the back of the panel.

For ceiling panel installations, you may need to use ceiling supports to hold the panels in place while the glue dries.

To ensure that you maximise the strength of the glue, don't make any adjustments or remove the panel after bonding.

Important notes:

This product is for residential, private use only. The end-user is responsible for installing the product in a way that complies with local fire safety standards and regulations, particularly in buildings with high occupancy rates, such as event venues, bars and nightclubs.

HQ - Factory and office

Rua do Polo 3 N^o 151 - Freamunde
4590-335 Paços de Ferreira, Portugal

T (+351) 255 070 044

Info and Sales

E sales@vicoustic.com

www.vicoustic.com

UNIV/COUSTIC
MAKES SOUND SENSE

© Vicoustic, 2026 | V2

No parts of this document might be copied and/or published without written consent of Vicoustic.